



**EKOTEKS LABORATUVAR ve GÖZETİM  
HİZMETLERİ A.Ş.**  
Esenyurt Firuzköy Bulvarı No:29 34325 Avcılar  
İstanbul/ TÜRKİYE

**TEST REPORT**  
DENEY RAPORU

16056953

12-16

## EKOTEKS

**Customer name:** ARITEKS BOYACILIK TİCARET VE SAN. A.Ş.  
**Address:** Velimeşe OSB Mah. Hacı Şeremet 5. Sokak 9/9 ERGENE/ TEKİRDAĞ  
**Buyer name:** -  
**Contact Person:** ÖZGÜR KUŞKU  
**Order No:** -  
**Article No:** -  
**Name and identity of test item:** One sample of (claimed to be 99% Cotton, 1% Carbon; 360 gr/m<sup>2</sup>) dark navy woven fabric.  
**The date of receipt of test item:** 19.12.2016  
**Re-submitted/re-confirmation date:** -  
**Date of test:** 19.12.2016-26.12.2016  
**Remarks:** -  
**Sampling:** The results given in this report belong to the received sample by vendor.  
**End-Use:** -  
**Care Label:** Not specified.  
**Number of pages of the report:** 3



**Date**  
26.12.2016

**Customer Representative**  
N. FİSUN EROL

**Head of Testing Laboratory**  
Sevim A. RAZAK

This report shall not be reproduced other than in full except with the permission of the laboratory.  
Testing reports without signature and seal are not valid.


EKOTEKS LABORATUVAR ve GÖZETİM  
HİZMETLERİ A.Ş.

16056953

12-16

REQUIRED TESTS	RESULT	COMMENTS
<b>PHYSICAL PROPERTIES TESTS</b>		
Flammability	-	
No requirement was given by vendor.		

REMARK: Original samples are kept for 3 months and all technical records are kept for 5 years unless otherwise specified. The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95 %. Tests marked (\*) in this report are not included in the accreditation schedule.

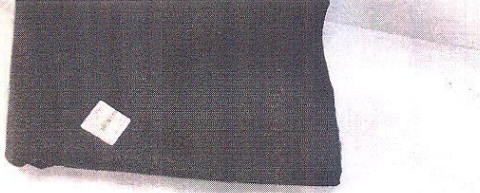

16056953

This report shall not be reproduced other than in full except with the permission of the laboratory.  
*Testing reports without signature and seal are not valid.*

## TEST RESULTS

### FLAMMABILITY; ISO 15025:2000(\*)

Applied cleaning procedure

Conditioning  
Test Atmosphere  
Face Tested  
Sample size  
Flame height  
Gas type  
Flame Application Angle  
Flame Application Time

After 100 washes, test sample was washed according to ISO  
15025:2000 standard @ 60°C, tumble dry.  
65±5 % RH, 20±2°C/24 h  
10°C-30°C / 15-80 % RH, 0.2 m/sec airflow test cabinet  
Front face  
200 x 160 mm (length x width)  
40± 2 mm  
Butane  
90°- Surface ignition  
10 sec

"The following test results relate only to the ignitability of the combinations of materials under the particular conditions of test ; they are not intended as a means of assessing the full potential fire hazard of the materials in use."

	1	2	3	4	5	6
	^	^	^	>	>	>
Afterflame Time (sec)	-	-	-	-	-	-
Afterglow Time (sec)	-	-	-	N	N	N
Flaming Debris	N	N	N	N	N	N
Flame to Edge	N	N	N	N	N	N
Hole Formed (only for surface ignition)	N	N	N	N	N	N
Ignition of Filter Paper	N	N	N	N	N	N

"^" : Length Direction  
">" : Width Direction

Y: Yes  
N: No